



Photo



Descriptions

TO BE CONFIRMED

Applicable Models


- MCF-GA35VB ■ MCFH-GA60VB
- MCF-GA50VB ■ MCFZ-A12WV
- MCF-GA60VB ■ MCFZ-A18WV
- MCFH-GA35VB ■ MCFZ-A24WV
- MCFH-GA50VB

Specifications

TO BE CONFIRMED

Dimensions

Unit : mm

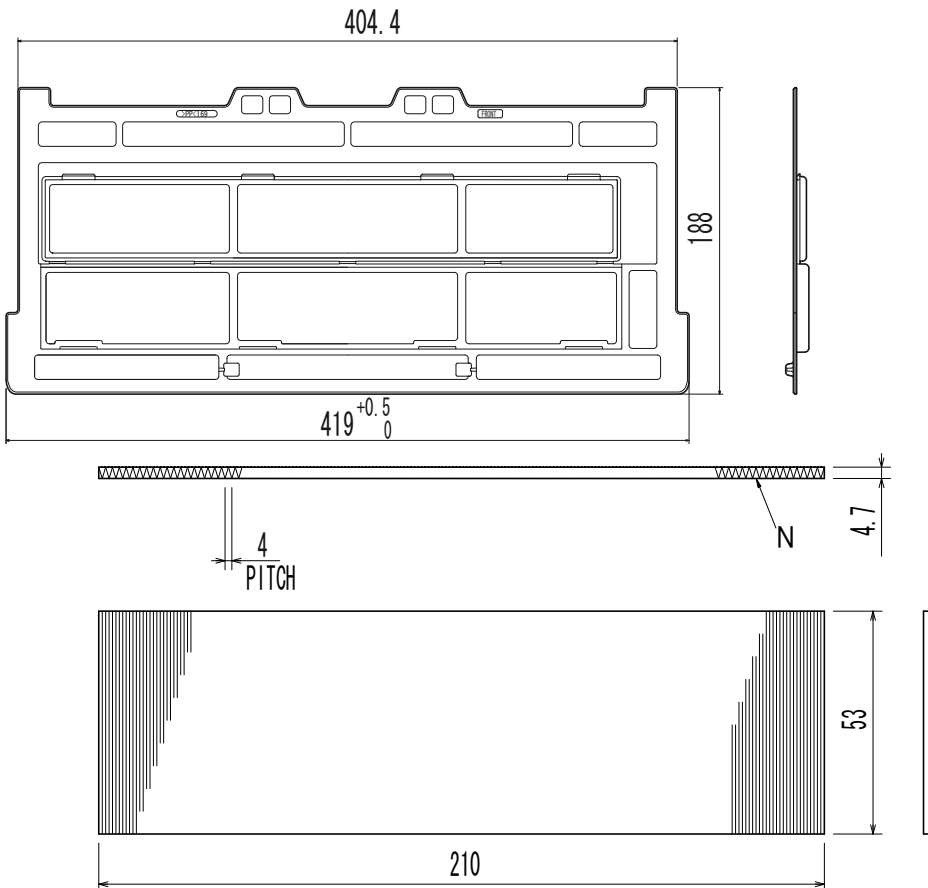


How to Use / How to Install

CLEANING THE AIR FILTER/THE DEODORIZING FILTER (OPTION)

Cleaning the air filter (about once every 2 weeks)

- 1 Remove the air filter .
 - Pull the air inlet knob forward.
-
- (If there is deodorizing or air cleaning filter (OPTION), please remove it before cleaning the air filter.)
- 2 Remove dirt from the air filter using a vacuum cleaner or by washing the filter with water.
 - If the dirt is noticeable, wash the filter with a solution of mild detergent diluted in lukewarm water.
 - If hot water (50°C or more) is used, the filter may be deformed.
 - 3 After washing with water/lukewarm water , dry the air filter well in the shade.
 - Do not expose the air filter to direct sunlight or heat from a fire when drying it.
 - 4 Install the air filter.
 - Set the air inlet knob.



Cleaning the deodorizing filter (about once every 2 weeks)

- 1 Remove the air filter and the deodorizing filter together. Then separate the deodorizing filter (Gray sponge type) from the air filter.
 - The deodorizing filter is harmless to people. However, to keep its effectiveness, be sure to hold the frame and not to touch the surface of the filter with your hand.
-
- 2 Soak the filter together with its frame in lukewarm water for about 15 minutes.
 - If the dirt is noticeable, use a solution of mild detergent diluted in lukewarm water.
 - If hot water (50°C or more) is used, the filter may be deformed.
 - Do not use a scrubbing brush or sponge. This may damage the surface of the filter.
 - Do not use a chlorine detergent.
 - 3 After washing with water/lukewarm water, dry the deodorizing filter well in the shade.
 - Do not expose the deodorizing filter to direct sunlight or heat from a fire when drying it.

- 4 Attach the deodorizing filter to the air filter. (Place the catch into the hole of the air filter for the security.) Then install both of them to the body.

