



### Photo



### Descriptions

TO BE CONFIRMED

### Applicable Models

- MCF-GA35VB
- MCF-GA50VB
- MCF-GA60VB
- MCFH-GA35VB
- MCFH-GA50VB
- MCFH-GA60VB
- MCFZ-A12WV
- MCFZ-A18WV
- MCFZ-A24WV

### Specifications

TO BE CONFIRMED

### Dimensions

Unit : mm


TO BE CONFIRMED

# How to Use / How to Install

## CLEANING THE AIR FILTER/THE DEODORIZING FILTER (OPTION)

### Cleaning the air filter (every 2 weeks)

- 1 Remove the air filter.**
- Pull the air inlet knob forward.

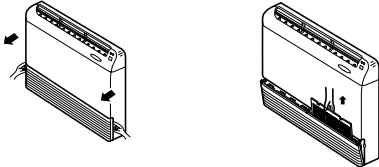


(If there is deodorizing or air cleaning filter (OPTION), please remove it before cleaning the air filter.)

- 2 Remove dirt from the air filter using a vacuum cleaner or by washing the filter with water.**
- If the dirt is noticeable, wash the filter with a solution of mild detergent diluted in lukewarm water.
  - If hot water (50°C or more) is used, the filter may be deformed.


- 3 After washing with water/lukewarm water, dry the air filter well in the shade.**
- Do not expose the air filter to direct sunlight or heat from a fire when drying it.

- 4 Install the air filter.**
- Set the air inlet knob.



### Cleaning the deodorizing filter (every 2 weeks)


- 1 Remove the air filter and the deodorizing filter together. Then separate the deodorizing filter (Gray sponge type) from the air filter.**
- The deodorizing filter is harmless to people. However, to keep its effectiveness, be sure to hold the frame and not to touch the surface of the filter with your hand.

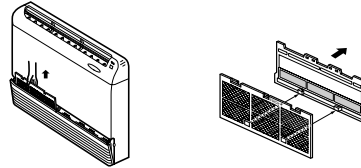

- 2 Soak the filter together with its frame in lukewarm water for about 15 minutes.**
- If the dirt is noticeable, use a solution of mild detergent diluted in lukewarm water.
  - If hot water (50°C or more) is used, the filter may be deformed.
  - Do not use a scrubbing brush or sponge. This may damage the surface of the filter.
  - Do not use a chlorine detergent.

- 3 After washing with water/lukewarm water, dry the deodorizing filter well in the shade.**
- Do not expose the deodorizing filter to direct sunlight or heat from a fire when drying it.

- 4 Attach the deodorizing filter to the air filter. (Place the catch into the hole of the air filter for the security.) Then install both of them to the body.**

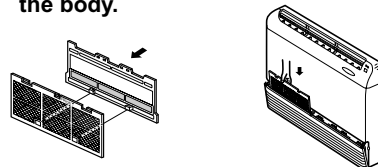

#### Deodorizing filter

- Cleaning is necessary about once every 2 weeks. However, if the dirt is noticeable, clean more often.
- When the colour of the filter is not restored even if the filter is washed as the procedure shown on the left (Cleaning the deodorizing filter) or when the filter becomes black, replace the filter with a new one.
- Standard interval for filter replacement is about 1 year.